

OUTRIGGER
IN (LH)

LIFT
DOWN

WINCH
DOWN

EXTN.
IN

D. WINCH
IN

OUTRIGGER
IN (RH)



LOAD CHART


ESCORTS TRX 15

RADIUS (M)	BOOM LENGTH IN METERS - MANUAL EXTENSION RETRACTED					MANUAL EXTENSION EXTENDED
	5.93	8	10	12	13.85	
2	7500	7500	7500			
3	7500	7500	6900	5200		
4	5750	5700	5070	4500	3970	
5		4400	4760	4000	3460	1680
6		3600	3525	3475	3100	1575
7			2900	2900	2750	1475
8			2400	2478	2400	1400
9				2130	2080	1320
10					1775	1250
11					1550	1180
12					1350	1135
13						1100
14						900
15						

BOOM PIVOT TO INNER LUG 1ST JIB EXTN. MANUAL EXTN. RETRACTED			
3.85	5	6	7.81
12000	11000	11000	10550
	7000	7000	6700
		4800	4750
			3570

15 LUG BOOM FULLY RETRACTED	
RADIUS (M)	S.W.L (KG)
1.5	15000

FLY JIB (BOOM FULLY EXTENDED)	
750	
750	
700	
700	
600	
650	
600	
500	

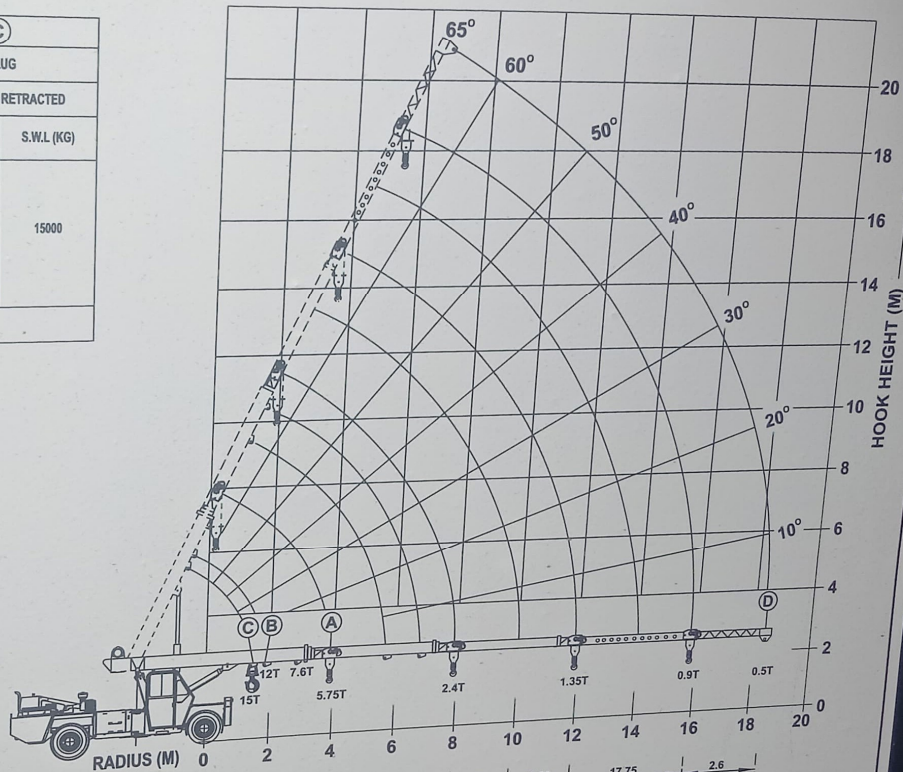

- RADIUS IS THE HORIZONTAL DISTANCE MEASURED FROM THE CENTRE OF FRONT WHEEL TO THE LOAD POINT
- S.W.L. ARE BASED ON 85% STABILITY & STRENGTH.
- S.W.L. ARE BASED ON FIRM LEVEL GROUND WITH TYRES 11x20-16 PLY INFLATED TO 115 PSI, WEIGHT OF HOOKS, BLOCKS, SLINGS & CHAIN ETC. INCLUDED.
- LIFT & CARRY - THE S.W.L. SHALL BE CARRIED WITH THE MINIMUM BOOM LENGTH & AS CLOSE TO THE GROUND AS POSSIBLE AT SPEEDS NOT IN EXCESS OF 2 KM/PH.
- BOOM HEAD MOUNTED RHINO HOOK CAPACITY - 6000 Kg.

C7312608